


## DIMENZIJE – TEHNIČNI LIST

### HIDRAVLICNA DVIŽNA POTEZNICA – 60/30min.360 fi 19/19

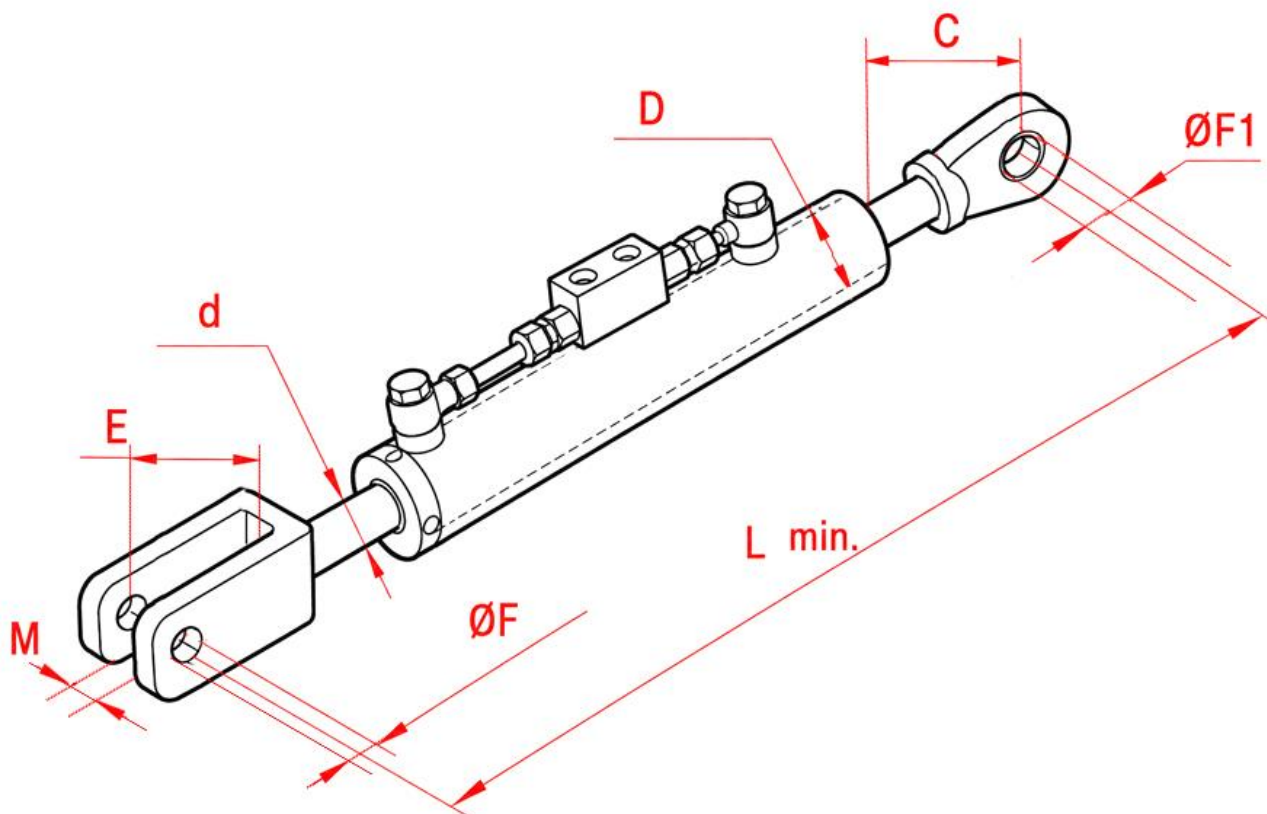

|                                                              |                     |
|--------------------------------------------------------------|---------------------|
| Notranja širina vilic "M":                                   | 31 mm               |
| Razdalja med dnom cilindra in središčem luknje "C":          | 70 mm               |
| Razdalja med notranjo stranjo vilic in središčem luknje "E": | 80 mm               |
| Premmer batnice "d":                                         | 30 mm               |
| Maksimalni tlak:                                             | 250 bar             |
| Blok ventil:                                                 | da                  |
| Teža izdelka:                                                | 6,6 kg              |
| Notranji premer cilindra "D":                                | 60 mm               |
| Sila raztegovanja cilindra (pri 180 bar):                    | 5,09 ton            |
| Sila krčenja cilindra (pri 180 bar):                         | 3,82 ton            |
| Premmer luknje na batnici "F":                               | 19,3 mm             |
| Minimalna dolžina "Lmin":                                    | 360 mm              |
| Premmer luknje na cilindru "F1":                             | 19,3 mm             |
| Hod cilindra:                                                | 90 mm               |
| Zaščita:                                                     | barvan (barva črna) |

| Šifra | Znamka  | Model                                              |
|-------|---------|----------------------------------------------------|
| 11679 | GOLDONI | QUASAR 85 - Serie Star Quadrifoglio versione bassa |

