


DIMENZIJE – TEHNIČNI LIST

HIDRAVLIČNA DVIŽNA POTEZNICA – 70-35min.500 fi 24,5-24,5

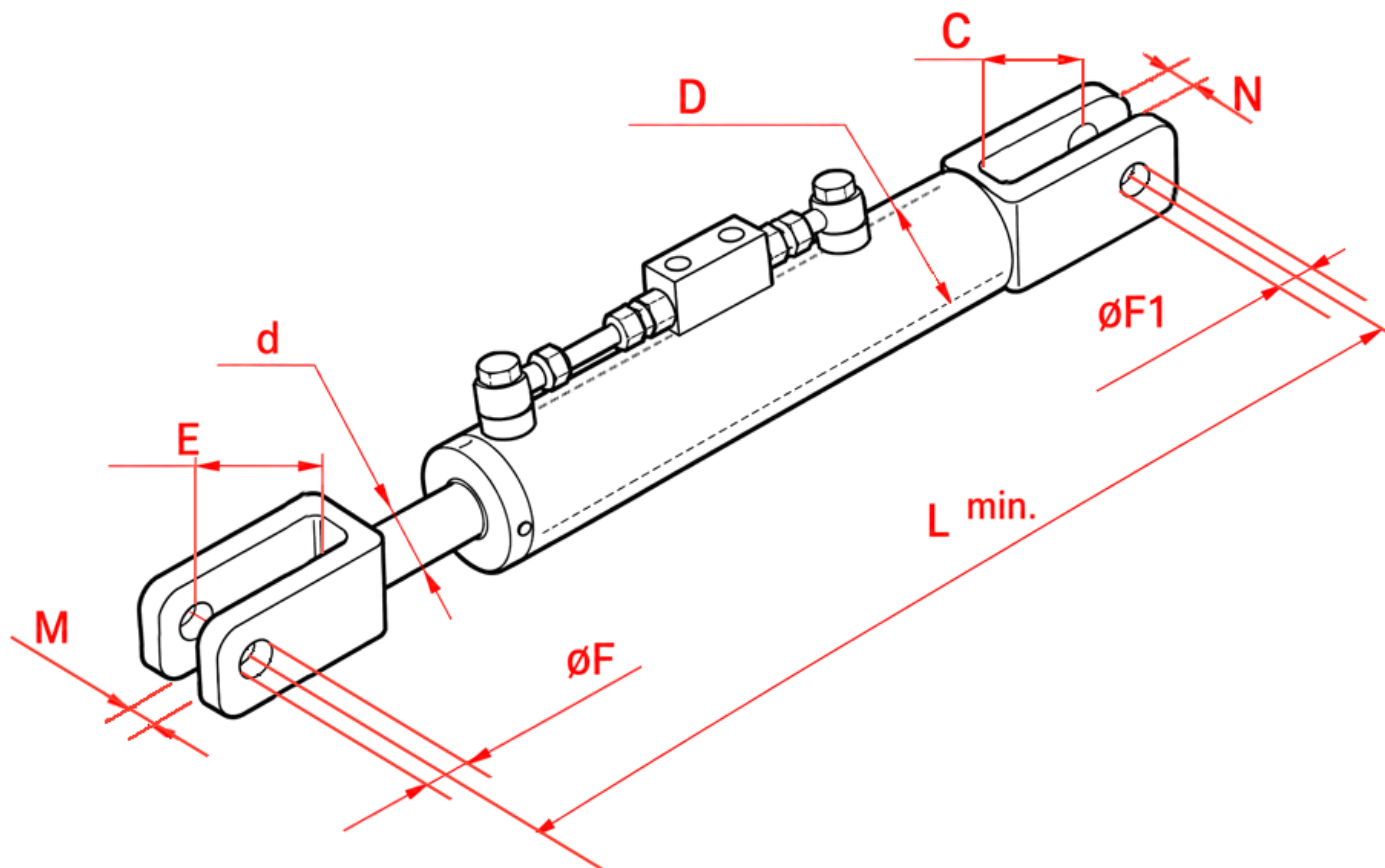

Notranja širina vilic "N":	47 mm
Notranja širina vilic "M":	30 mm
Razdalja med dnom cilindra in središčem luknje "C":	98 mm
Razdalja med notranjo stranjo vilic in središčem luknje "E":	90 mm
Premmer batnice "d":	35 mm
Maksimalni tlak:	250 bar
Blok ventil:	da
Teža izdelka:	10,2 kg
Notranji premer cilindra "D":	70 mm
Sila raztegovanja cilindra (pri 180 bar):	6,92 ton
Sila krčenja cilindra (pri 180 bar):	5,19 ton
Premmer luknje na batnici "F":	24,5 mm
Minimalna dolžina "Lmin":	500 mm
Premmer luknje na cilindru "F1":	24,5 mm
Hod cilindra:	120 mm
Zaščita:	barvan (barva črna)

Šifra	Tip Traktorja	Model traktorja
11639	DEUTZ	Agroplus F 320 - 410 - 420
11699	JOHN DEERE	5410 N - 5510 N
11721	LAMBORGHINI	RF 80 - 90 – 100
11757	SAME	Frutteto III 80 - 90 - 100

